

# Little Green 1400, 1425, 50Y6 Series

## No Spray

- 1) Is there water in the solution tank? The water goes in the tank with the cap and insert as pictured below.




- 2) Make sure solution tank is securely seated into place. The **Green Little Green's** solution tank is manufactured with a thicker plastic at the base, which may require pressing downward on the solution tank in order to seat it correctly into place.

Gap indicates tank is  
Not seated correctly



- 3) With tool removed, check to see if wand sprays

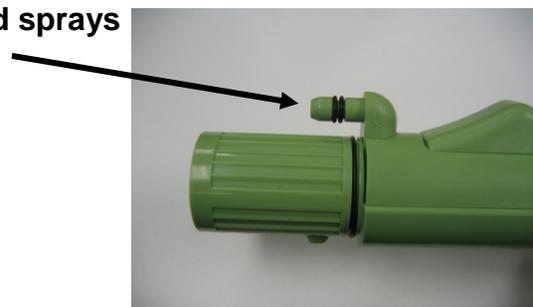

**If YES, it sprays without tool attached...**

- a) Check the tool for cracks. If the tool is cracked it will need to be replaced.
- b) Clean the tool's spray tip with a brush, and also by using a paperclip to clean out any clog in the spray tip.

**If NO spray without tool attached...**

- a) Make sure there is water in the solution tank; if no—fill the tank.
- b) Check for the black or red tank (auto-load) gasket on the Solution Tank Cap/Insert. If it is missing, the gasket is most likely lodged in base of unit (the receiving area for the solution tank). When this happens, the tank does not seat properly and the unit will not spray. It will be difficult to see the gasket in the base of the unit if the gasket is black. The gasket is a soft rubber material. Reattach the gasket by pushing the rounded portion of the gasket over the lip on the auto-load assembly, as shown below. If the auto-load gasket is missing, a new one will need to be ordered.



- c) Check to see if water comes through the cap insert by pushing up on the X-shaped valve on the auto-load assembly.



**If NO water comes through the cap when pressing the X-valve...**

- **Soak cap** and insert in warm water and white vinegar for 30 minutes. If still no water comes through the cap a new one will need to be ordered.

**If YES, water comes through the cap when pressing the X-valve...**

- **Check to see if machine has lost its prime:** with upholstery tool removed, depress trigger for 30 seconds with unit turned off. With the unit turned on, depress the trigger, lift solution tank up and down and gently squeeze solution tank to prime.

**Did this work? If NO...**

• **Suction up several tanks full of warm clean water into the collection tank, taking care to not overflow the collection tank.** This will clear clogs from the solution line inside the flex hose. Once this has been done, try to spray again.

- 4. If still not spray,** please contact one of our Authorized Service Centers to have a quality technician inspect your unit.